



BBB14210A

by Burndy
Catalog ID: BBB14210A

Prop 65 Notice

CU BusBar, 16, 4 BusBar is used in a variety of applications.

- Copper busbar is used in a variety of applications. UL Listed for grounding. Can be used as a common ground point and can also be used in "power" applications as well.

Features: Bare Copper Busbar, UL Listed For Grounding, Available In Many Sizes And Hole Patterns, Brackets And Insulators Included With Most Styles, Also Available In Undrilled, Horizontal And Vertical Versions, Busbar Is Used In A Variety Of Applications, Can Be Used As A Common Ground Point And Power Applications As Well, Number Of Holes: 16, With Insulator-bracket: Yes, Dimension K: 0.28 IN, Dimension F1: 1 IN, Dimension E1: 0.63 IN

Product Details

General

Application	For Used As A Common Ground Point And Power Applications
Material	Copper
Physical Attribute - Number of Holes	16
Sub Brand	BUS BAR
Type	BBB
UPC	781810489314
UPC 12 Digit	7818104893144

Dimensions

Dimension - Bar Length inch	10 in
Dimension - Bar Length mm	254 mm
Dimension - Bar Thickness inch	0.25 in
Dimension - Bar Thickness mm	6 mm
Dimension - Bar Width inch	2 in
Dimension - Bar Width mm	51 mm
Dimension - Hole Size inch	0.28 in
Dimension - Hole Size mm	7 mm
Dimension - Width fraction	2 in
Dimension - Width inch	2.00 in

Certifications and Compliance

Certification - CSA Approved	No
Certification - UL Recognized	No
Certification - cULus	Yes
Standards - RoHS Compliance Status	CM

Logistics

Minimum Pack Quantity	1
-----------------------	---



BBB122144N

by Burndy

Catalog ID: BBB122144N

Copper busbar is used in a variety of applications. Can be used as a common ground point and can also be used in "power" applications as well.

Product Details

General

UPC	781810512890
-----	--------------

Logistics

Minimum Pack Quantity	1
-----------------------	---

GSTUD12HY

by Burndy
Catalog ID: GSTUD12HY

Prop 65 Notice

Structural Steel Grounding Connector, 1/0 AWG 1/2" Rod, Copper Coated, Nickel Plated

- May be welded to steel surfaces quickly and easily
- No disk grinding needed
- Knurled surface for better gripping
- Copper plated
- May be installed during adverse weather conditions



Product Details

General

Material	Steel
Plated	Y
Plating Type	Nickel
Trade Name	VERSITAIL™
UPC	781810274187
UPC 12 Digit	7818102741877

Dimensions

Dimension - B Length fraction	25/49 in
Dimension - B Length inch	0.51 in
Dimension - D inch	1.25 in
Dimension - Ground Rod Size	1/2 in
Dimension - L Length Overall mm	148 mm
Dimension - Length Overall inch	5.80 in
Physical Attribute - Tongue Angle	45 Degree

Conductor Related

Conductor - Copper Str Size Range	1/0 AWG
Conductor - Rod Size	1/2 in
Conductor - Rod Size Range	1/2 in
Conductor Type	<ul style="list-style-type: none"> • Rod-Size • CU C Str-Size

Certifications and Compliance

Certification - CSA Approved	No
Certification - ETL	No

Certification - UL Listed Direct Burial	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance Status	CM
UL Listed	No

Logistics

Minimum Pack Quantity	1
-----------------------	---



YG14B2TC2C2C

by Burndy
Catalog ID: YG14B2TC2C2C

Prop 65 Notice

Bus Bar Copper Alloy Connector, #2 AWG.

- Compression Busbar Connector
- Easier to use than Exothermic Connections
- Ideally suited for cellular tower applications.

Features: BURNDY's YG14B2TC2C6C Compression Bus Bar Connector Is Ideally Suited For Cellular Tower Applicatons And Is Easier To Use Than Exothermic Connections, This High Conduc Tivity Wrought Copper Connector Allows Attachment Of The Ground Conductor To The Ground Bus With Just One Crimp Using The BURNDY Y750 HYPRESS Hydraulic Compression Tool And The U1105 Die Set, This Exclusive Patent Pending Design Allows The User To Attach #2 AWG Solid/Stranded And/Or #6 Solid/Stranded Copper Conductor To 1/4 Thick Copper Bus Bar, This Connection Is Suitable Using (1) Or (2) Conductors For Power, Grounding And Bonding Applicitions, UL Listed To Both UL486 And UL467 (Suitable For Direct Burial) Ensures That This Connector Will Meet The Rigors Of Either Application, Prefilled With PENETROX E Compound And Strip Sealed, Tools, Die Set Catalog Number, And (number Of Crimps): Y750, PAT750 Tool, U1105 Die, (1)

Product Details

General

Application	For Direct Barial And Cellular Tower Applicatons And Is Easier To Use Than Exothermic Connections
Connector Type	Tap
Material	Copper Alloy
Physical Attribute - Number of Crimps Required	1
Plated	N
Plating Type	Unplated
Prefilled Oxide Inhibitor	Y
Sub Brand	HYGROUND
Trade Name	HYGROUND®
Type	YG-B
UPC	781810232712
UPC 12 Digit	7818102327122

Dimensions

Dimension - B Length fraction	64/79 in
Dimension - B Length inch	0.81 in
Dimension - Bus Bar Size Tap Side inch	1/4" Thick Busbar

Conductor Related

Conductor - Copper Solid Size A	2 AWG
Conductor - Copper Solid Size A Range	2 AWG
Conductor - Copper Solid Size B	2 AWG

Conductor - Copper Solid Size B Range	2 AWG
Conductor - Copper Str Size A	2 AWG
Conductor - Copper Str Size A Range	2 AWG
Conductor Type	<ul style="list-style-type: none"> • CU C Str-Size • CU C Solid-Size • Bar-Size

Certifications and Compliance

Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Listed Direct Burial	Yes
Certification - UL Recognized	No
Certification - cULus	Yes
Industry Standard(s)	UL467
Standards - Industry Standards Met	<ul style="list-style-type: none"> • UL467 • UL 486A • CSA C22.2 No 65
Standards - RoHS Compliance Status	CM
UL Listed	No



YGA2C2TC38

by Burndy
Catalog ID: YGA2C2TC38

Prop 65 Notice

GRD HYLUG-8SOL/STR-1/4ST.

Features: Irreversible Compression HYLUG Ground Terminal Specifically Designed For Grounding Applications, Each Connector Has An Inspection Probe Hole To Ensure Proper Cable Insertion, UL467 Listed, Acceptable For Direct Burial In Earth Or Concrete, UL486A Listed, Prefilled With PENETROX Compound And Strip Sealed, Tools, Die Set Catalog Number, And (number Of Crimps): Mechanical: MD7-34R, OUR840 Tool, W2CVT, X2CRT Die, (2), Y2MR Tool, (4), Hydraulic: Y35, Y39, PAT750, Y750 Tool, U2CRT Die, (2), Y45 Tool, U2CRT Die With PT-6515 Adapter, (2), Y46 Tool, U2CRT Die With PUADP-1 Adapter, (2), Conductor Type: Copper, Color Code: Brown, Die Index: 10

Product Details

General

Application	For Direct Burial In Earth Or Concrete, Grounding Applications
Color Code	Brown
Connector Type	Terminal
Die Index	10
Material	Copper
Plated	N
Plating Type	Unplated
Sub Brand	HYLUG
Trade Name	HYLUG™
Type	Terminals
UPC	781810109649
UPC 12 Digit	7818101096499

Dimensions

Dimension - B Length fraction	1-1/4 in
Dimension - B Length inch	1.25 in
Dimension - Bolt Hole Size inch	0.39 in
Dimension - Bolt Size inch	0.38 in
Dimension - Hole Size inch	0.40 in
Dimension - Hole Size mm	10 mm
Dimension - L Length Overall mm	88 mm
Dimension - Length Overall inch	3.48 in
Dimension - N inch	0.41 in
Dimension - Outside Diameter inch	0.42 in
Dimension - Pad Width inch	0.60 in
Dimension - Strip Length inch	1 in
Dimension - Stud Size fraction	1/2

Dimension - Stud Size inch	3/8
----------------------------	-----

Conductor Related

Conductor - Copper Solid Size	2
Conductor - Copper Solid Size Range	2
Conductor - Copper Str Size	2 Sol./2 Str.
Conductor - Copper Str Size Range	2 Sol./2 Str.
Conductor Type	<ul style="list-style-type: none"> • CU C Solid-Size • CU C Str-Size

Certifications and Compliance

Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Listed Direct Burial	Yes
Certification - UL Recognized	No
Certification - cULus	No
Industry Standard(s)	<ul style="list-style-type: none"> • UL467 • UL 486A-486B
Standards - Industry Standards Met	<ul style="list-style-type: none"> • UL467 • UL 486A-486B
Standards - RoHS Compliance Status	CM
UL Listed	Yes

YGA25N

by Burndy
Catalog ID: YGA25N

Prop 65 Notice

Grounding Irreversible Compression Terminals.



Product Details

General

Color Code	Pink
Connector Type	Terminal
Die Index	12;348
Material	Copper
Physical Attribute - Number of Crimps Required	2
Plated	N
Plating Type	Unplated
Trade Name	HYLUG™
Type	Terminals
UPC	781810226131
UPC 12 Digit	7818102261311

Dimensions

Dimension - B Length fraction	1-1/3 in
Dimension - B Length inch	1.35 in
Dimension - Hole Size inch	0.56 in
Dimension - Hole Size mm	14 mm
Dimension - L Length Overall mm	78 mm
Dimension - Length Overall inch	3.06 in
Dimension - N inch	0.62 in
Dimension - Outside Diameter inch	0.51 in
Dimension - Strip Length inch	1-7/16

Conductor Related

Conductor - Copper Str Size	1/0
-----------------------------	-----

Conductor - Copper Str Size Range	1/0
Conductor Type	<ul style="list-style-type: none">• CU C Solid-Size• CU C Str-Size

Certifications and Compliance

Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Listed Direct Burial	Yes
Certification - UL Recognized	No
Certification - cULus	No
Industry Standard(s)	UL467
Standards - Industry Standards Met	UL467
Standards - RoHS Compliance Status	UI
UL Listed	No



YGC10C10

by Burndy

Catalog ID: YGC10C10

Prop 65 Notice

Copper CRIMPIT, #10 Sol. #10 Str. (Run), #10 Sol. #10 Str. (Tap)

Product Details

General

Type	Taps
UPC	621945485938

Certifications and Compliance

Certification - CSA Approved	No
Certification - ETL	No
Standards - RoHS Compliance Status	CM
UL Listed	Yes



YGF292N

by Burndy
Catalog ID: YGF292N

Prop 65 Notice

Copper Compression Grounding Plate, 2 AWG - 250 kcmil, 1/2" Stud, 1-3/4" Stud Hole Spacing.

Features: Copper Compression Grounding Plate, 2 AWG - 250 kcmil, 1/2 IN Stud, 1-3/4 IN Stud Hole Spacing

Product Details

General

Application	Used to position the grounding plate on a threaded rod prior to placement of the concrete.
Die Index	997
Material	Copper
Physical Attribute - Number of Crimps Required	2
Physical Attribute - Number of Tapped Holes	2
Plated	N
Plating Type	Unplated
Prefilled Oxide Inhibitor	Y
Sub Brand	GROUNDING PLATE
Trade Name	HYGROUND®
Type	YGF
UPC	781810220504
UPC 12 Digit	7818102205044

Dimensions

Dimension - D inch	3.25 in
Dimension - F Width Center to Center inch	1.75 in
Dimension - Height fraction	3-31/50 in
Dimension - Height inch	3.62 in
Dimension - L Length Overall mm	147 mm
Dimension - Length Overall inch	5.78 in
Dimension - Pad Width inch	2.00 in
Dimension - Thread Size	3/8 -16
Physical Attribute - Tongue Angle	Straight

Conductor Related

Conductor - Copper Str Size	2 AWG;1 AWG;1/0 ;2/0 AWG;3/0 AWG;4/0 AWG;250 kcmil
Conductor - Copper Str Size Range	2 AWG-250 kcmil
Conductor Type	CU C Str-Size

Certifications and Compliance

Certification - CSA Approved	Yes
Certification - ETL	No
Certification - UL Listed Direct Burial	Yes
Certification - UL Recognized	No
Certification - cULus	No
Industry Standard(s)	NEMA Size Holes
Standards - Industry Standards Met	<ul style="list-style-type: none">• UL467• IEEE 837
Standards - RoHS Compliance Status	EX
UL Listed	Yes

YGF294N

by Burndy
Catalog ID: YGF294N

Prop 65 Notice

Copper Compression Grounding Plate, 4 Hole w/o Inspection Hole, 2-250 kcmil, 1/2" Stud, 1-3/4" Stud Hole Spacing.

Features: Copper Compression Grounding Plate, 4 Hole w/o Inspection Hole, 2-250 kcmil, 1/2 IN Stud, 1-3/4 IN Stud Hole Spacing



Product Details

General

Application	Used to position the grounding plate on a threaded rod prior to placement of the concrete.
Die Index	997
Material	Copper
Physical Attribute - Number of Crimps Required	2
Physical Attribute - Number of Tapped Holes	4
Plated	N
Plating Type	Unplated
Prefilled Oxide Inhibitor	Y
Sub Brand	GROUNDING PLATE
Trade Name	HYGROUND®
Type	YGF
UPC	781810220511
UPC 12 Digit	7818102205111

Dimensions

Dimension - D inch	3.25 in
Dimension - F Width Center to Center inch	1.75 in
Dimension - Height fraction	3-31/50 in
Dimension - Height inch	3.62 in
Dimension - L Length Overall mm	147 mm
Dimension - Length Overall inch	5.78 in
Dimension - Pad Width inch	3.25 in
Dimension - Thread Size	3/8 -16
Physical Attribute - Tongue Angle	Straight

Conductor Related

Conductor - Copper Str Size	2 AWG;1 AWG;1/0 ;2/0 AWG;3/0 AWG;4/0 AWG;250 kcmil
Conductor - Copper Str Size Range	2 AWG-250 kcmil
Conductor Type	CU C Str-Size

Certifications and Compliance

Certification - CSA Approved	Yes
Certification - ETL	No
Certification - UL Listed Direct Burial	Yes
Certification - UL Recognized	No
Certification - cULus	No
Industry Standard(s)	NEMA Size Holes
Standards - Industry Standards Met	<ul style="list-style-type: none">• UL467• IEEE 837
Standards - RoHS Compliance Status	EX
UL Listed	Yes



B10960

by Burndy
Catalog ID: B10960

Mold Connector, BCC-6, Conductor Size: 4/0 AWG - 750 KCMIL, Tools: B38-0309-00 Flint Ignitor, Accessories: B38-3922-00 Mold Cleaning Brush.

Features: BCC-6 Type Molds Are Used To Join Horizontal Parallel Tap To Run Connections, The Tap Cable Is Over The Run Cable, Size Range Is 6 AWG Through 4/0 AWG Concentric Stranded Copper Conductors, Required Tools: B38-0309-00 Flint Ignitor, Recommended Accessories: B38-3922-00 Mold Cleaning Brush, B38-0135-00 Cable Cleaning Brush, B38-0330-00 Cable Clamp, Conductor Type: Concentric Stranded Copper

Product Details

General

Application	For Joining Horizontal Parallel Tap To Run Connections
Sub Brand	BURNDYWELD
Trade Name	BURNDYWeld®
Type	Molds
UPC	781810491607
UPC 12 Digit	7818104916077

Conductor Related

Conductor - Copper Str Run	750 Kcmil
Conductor - Copper Str Tap	4/0 AWG
Conductor Type	CU C Str-Size

Certifications and Compliance

Standards - RoHS Compliance Status	CM
------------------------------------	----



B1212

by Burndy
Catalog ID: B1212

Horizontal Parallel Run Cables to Ground Rod Mold

Product Details

General

Trade Name	BURNDYWeld®
Type	Molds
UPC	781810387252
UPC 12 Digit	7818103872522

Conductor Related

Conductor - Copper Str Tap	250 kcmil
Conductor - Rod Size	5/8 in
Conductor Type	<ul style="list-style-type: none">• CU C Str-Tap• Rod-Size

Certifications and Compliance

Standards - RoHS Compliance Status	CM
------------------------------------	----

B1000

by Burndy
Catalog ID: B1000

Mold, Horizontal Cable Tap To Horizontal Lug, 350 kcmil,
150 Weld Metal, 3/8" X 1" Lug.



Product Details

General


Trade Name	BURNDYWeld®
Type	Molds
UPC	781810392256
UPC 12 Digit	7818103922566

Conductor Related

Conductor - Copper Str Size	350 kcmil
Conductor Type	CU C Str-Size

Certifications and Compliance

Standards - RoHS Compliance Status	CM
------------------------------------	----



B106

by Burndy
Catalog ID: B106

Handle Clamp, Nominal Size: 3 1/8" X 3-1/8" Square.

Fit 95 percent of all standard BURNDYWeld

Product Details

General

Application	For all molds having a price key 4, 7, 17, 22 or 24
Sub Brand	BURNDYWELD
Trade Name	BURNDYWeld®
Type	Molds
UPC	781810402597
UPC 12 Digit	7818104025977

Certifications and Compliance

Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance Status	CM
UL Listed	No

115CI

by Burndy
Catalog ID: 115CI

115 Weld Metal, Cast Iron Cartridge



Product Details

General

Trade Name	BURNDYWeld®
Type	Powder
UPC	781810402269
UPC 12 Digit	7818104022699

Certifications and Compliance

Standards - RoHS Compliance Status	CM
------------------------------------	----



GIE25

by Burndy
Catalog ID: GIE25

Prop 65 Notice

Accom: #6 SOL - 1/0 STR Cu Max of 3/4" Flat Bar,Cable & Rod

Product Details

General

Material	Copper
Plated	N
Plating Type	Unplated
UPC	621945127869
UPC 12 Digit	6219451278699

Certifications and Compliance

Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance Status	CM
UL Listed	No

GG1815TN

by Burndy
Catalog ID: GG1815TN

Prop 65 Notice

Mechanical Grounding Connector, Copper Bar/Strap/Braid/Cable to
Rod/Tube, 2"-2-3/8" Pipe



Product Details

General

Material	Copper Alloy, Cast, Tin Plated
Plated	Y
Plating Type	Tin Plated
U Bolt Type	257
UPC	621945455764
UPC 12 Digit	6219454557644

Dimensions

Dimension - Width inch	3.69 in
------------------------	---------

Certifications and Compliance

Certification - CSA Approved	No
Certification - UL Listed Direct Burial	Yes
Industry Standard(s)	UL467
Standards - Industry Standards Met	UL467
Standards - RoHS Compliance Status	EX



GA3

by Burndy
Catalog ID: GA3

Prop 65 Notice

WATER GROUND PIPE

Product Details

General

Material	Copper Alloy
Plated	N
Plating Type	Unplated
UPC	781810424087
UPC 12 Digit	7818104240877

Conductor Related

Conductor Type	<ul style="list-style-type: none">• CU C Solid-Size• CU C Str-Size
----------------	-------------------------------------------------------------------------------------------

Certifications and Compliance

Certification - CSA Approved	Yes
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance Status	UI
UL Listed	No



GA2

by Burndy
Catalog ID: GA2

Prop 65 Notice

#12 - #2 AWG; 1/2" to 1" Pipe

Product Details

General


Installation Torque Recommended in-lb	50
Material	Copper
Plated	N
Plating Type	Unplated
UPC	781810421925
UPC 12 Digit	7818104219255

Conductor Related

Conductor - Copper Str Size	2AWG to 12 AWG
Conductor Type	<ul style="list-style-type: none">• CU C Solid-Size• CU C Str-Size

Certifications and Compliance

Certification - CSA Approved	Yes
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance Status	CM
UL Listed	No

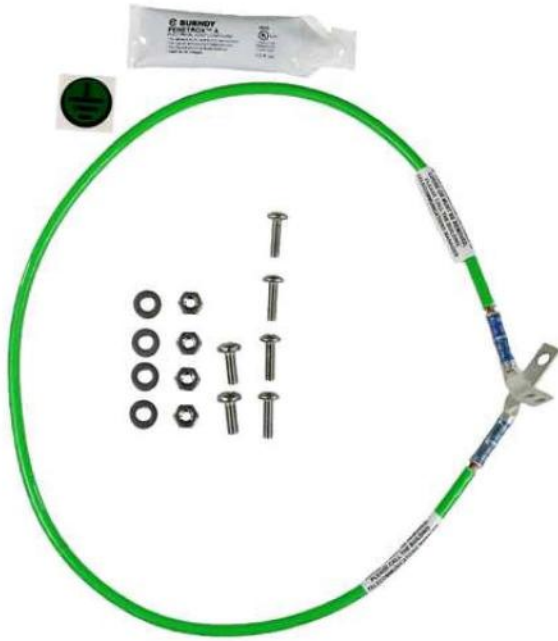

BGRKTD30DN

by Burndy
Catalog ID: BGRKTD30DN

GNDKIT,D LUG,30"AWG6,DN LUG,PX,HDW

Product Details

General

Type	Medium Conductors
UPC	621945516182

Dimensions

Length	30 in
--------	-------


Certifications and Compliance

Industry Standard(s)	TIA-607 Compliant
----------------------	-------------------

BGM10130

by Burndy
Catalog ID: BGM10130

GRIDMAX Copper Ground Mesh 10' X 130' 12" Centers #8 AWG.

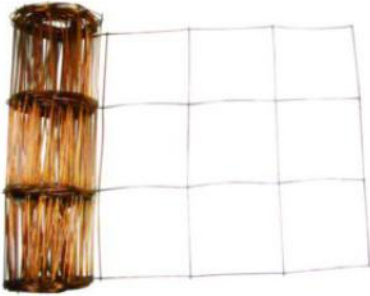

Product Details

General

Trade Name	GRIDMAX®
UPC	781810511107
UPC 12 Digit	7818105111077

Dimensions

Dimension - Height inch	80 in
Dimension - Width inch	10 in

Certifications and Compliance

Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Listed Direct Burial	Yes
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance Status	CM
UL Listed	No



KAG1MTGBRKT

by Burndy

Catalog ID: KAG1MTGBRKT

Neutral Bar Mounting Bracket

Product Details

General

Connector Type	Mounting Bracket
Material	Aluminum
UPC	781810659816

Certifications and Compliance

Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance Status	UI
UL Listed	No



K16P6C5P1/OCAG1

by Burndy
Catalog ID: K16P6C5P1/OCAG1

Prop 65 Notice

Dual rated Aluminum Neutral bar for copper and aluminum conductors, 21 Circuits, 14-1/0 AWG , 14-6AWG wire range

Product Details

General

Material	Aluminum
Plated	N
Plating Type	Unplated
UPC	781810665596
UPC 12 Digit	7818106655966

Dimensions

Dimension - Height inch	0.62 in
Dimension - L Length Overall mm	177 mm
Dimension - Length Overall inch	6.97 in
Dimension - Width inch	0.38 in

Electrical Ratings

Rating - Minimum Voltage	600
--------------------------	-----

Conductor Related

Conductor - AL Str Size Range	(4) 14-1/0 AWG , (17) 14-6 AWG
Conductor - Copper Str Size Range	(4) 14-1/0 AWG , (17) 14-6 AWG
Number Of Conductors	21

Certifications and Compliance

Certification - CSA Approved	Yes
Certification - ETL	No
Certification - UL Recognized	Yes
Certification - cULus	No
Standards - RoHS Compliance Status	EX
UL Listed	No

K5P6C2P1/0CAG1

by Burndy
Catalog ID: K5P6C2P1/0CAG1

Prop 65 Notice

Aluminum Neutral Bar



Product Details

General

Insulation	Y
Material	Aluminum
Plated	N
Plating Type	Unplated
Temperature Rating	194° F
UPC	781810665572
UPC 12 Digit	7818106655722

Dimensions

Dimension - Height inch	0.62 in
Dimension - L Length Overall mm	57 mm
Dimension - Length Overall inch	2.26 in
Dimension - Width inch	0.38 in
Dimension - Width mm	10 mm

Electrical Ratings

Rating - Minimum Voltage	600
--------------------------	-----

Conductor Related

Conductor - AL Str Size Range	1/0 AWG - 14 AWG
Conductor - Copper Str Size Range	1/0 AWG - 14 AWG

Certifications and Compliance

Certification - CSA Approved	Yes
Certification - ETL	No
Certification - UL Recognized	Yes
Certification - cULus	No
Standards - RoHS Compliance Status	EX
UL Listed	No



BSD20100

by Burndy
Catalog ID: BSD20100

BURNDY; Static Discharge Reel; Length: 100 FT Cable; Cable Type: Aircraft Steel; Cable Lock: Yes; Number Of Clamping Elements: 1; Housing Color: Red

Product Details

General

Cable Length	100 ft
Cable Type	Aircraft Steel
Color - Housing	Red
Material	Copper
Physical Attribute - Number of Clamping Elements	1
Plated	N
Plating Type	Unplated
UPC	781810677346
UPC 12 Digit	7818106773466

Dimensions

Cable Length Active	1200
Dimension - Height inch	9.5 in

Certifications and Compliance

Certification - CSA Approved	No
Standards - RoHS Compliance Status	UI



BSD2050

by Burndy
Catalog ID: BSD2050

Prop 65 Notice

Static Discharge Reels, Heavy Duty, Cable Length: 50 Feet.

Tension: Adjustable, Cable Type: Aircraft Steel, Number Of Clamping Elements: 1, Housing Color: Red, Cable Lock: Yes

Product Details

General

Application	Used to dissipate static charge build-up developed while filling or dispensing fuel or other combustible liquids from fuel trucks or rail cars
Cable Length	50 ft
Cable Lock	Y
Cable Type	Aircraft Steel
Color - Housing	Red
Material	Copper
Physical Attribute - Number of Clamping Elements	1
Plated	N
Plating Type	Unplated
Sub Brand	REEL
Tension	Adjustable
Type	Static Discharge Reel
UPC	781810504468
UPC 12 Digit	7818105044688

Dimensions

Cable Length Active	600
Dimension - Height inch	8.80 in
Dimension - Length Overall inch	8.60 in
Dimension - Width inch	3.40 in
Dimension - Width mm	86 mm

Conductor Related

Conductor Type	<ul style="list-style-type: none"> • CU C Solid-Size • CU C Str-Size
----------------	----------------------------------------------------------------------------------------------

Certifications and Compliance

Certification - CSA Approved	No
------------------------------	----