



INSULATED CUTTING TOOLS

ES20HVX, ESC32HVX, ESC25HVX

NEW



ES20HVX



ES20HVX – IN-LINE ACSR CUTTER

CAT NO.	UPC NO.	DESCRIPTION
N ES20HVX11	783310040491	20 mm Cutter, (PVC) 120V Charger, Two 4.0Ah Batteries
N ES20HVX12	783310040507	20 mm Cutter, (PVC) 12V Charger, Two 4.0Ah Batteries
N ES20HVX22	783310040514	20 mm Cutter, (PVC) 230V Charger, Two 4.0Ah Batteries
N B ES20HVXB	783310040521	20 mm Cutter, (PVC) Bare Tool Only



ES32HVX

ES32HVX – IN-LINE CABLE CUTTER

CAT NO.	UPC NO.	DESCRIPTION
N ES32HVX11	783310038085	32 mm Cutter, (PVC) 120V Charger, Two 4.0Ah Batteries
N ES32HVX12	783310038092	32 mm Cutter, (PVC) 12V Charger, Two 4.0Ah Batteries
N ES32HVX22	783310038108	32 mm Cutter, (PVC) 230V Charger, Two 4.0Ah Batteries
N B ES32HVXB	783310038115	32 mm Cutter, (PVC) Bare Tool Only



ESC25HVX



ESC25HVX – IN-LINE ACSR CUTTER

CAT NO.	UPC NO.	DESCRIPTION
N ESC25HVX11	783310040538	25 mm Cutter, (PVC) 120V Charger, Two 4.0Ah Batteries
N ESC25HVX12	783310040545	25 mm Cutter, (PVC) 12V Charger, Two 4.0Ah Batteries
N ESC25HVX22	783310040552	25 mm Cutter, (PVC) 230V Charger, Two 4.0Ah Batteries
N B ESC25HVXB	783310040569	25 mm Cutter, (PVC) Bare Tool Only



6-TON IN-LINE

EK425LX, EK628LX



EK425LX



EK628LX

- Intelli-CRIMP® technology notifies operator with a visual and audible alert in real time if crimp force is not achieved
- One trigger controls all tool functions
- Crimping head rotates 350°
- Patented spring pin jaw engagement
- LED work light illuminates dark work areas
- LED display with real time PSI reading
- Bluetooth® enabled
- EK628LX used with Greenlee 22 series dies – See page 262

SPECIFICATIONS

Crimping Force	6-Ton (54kN)
Length	14-3/4" (375 mm) without head or battery
Width	4" (108 mm)
Weight	6.6 lb (3 kg)
Battery	18V 4.0Ah Li-ion (EK425) or 18V 2.0Ah Li-ion (EK628)

CAPACITY (EK425LX)

5/8" Service Entrance Connectors	10-1/0 AWG
.840 Service Entrance Connectors	1/0-4/0 AWG
Aluminum "H" Taps	6-4/0 AWG
Copper "H" Taps	10-2 AWG
Copper Tension Splices	6-2/0 AWG
Aluminum Tension Splices	6-4/0 AWG
One Piece ACSR Tension Splices	4-1/0 AWG
Two Piece ACSR Tension Splices	2 AWG to 477 kcmil
Aluminum Jumper Splices	4 AWG to 266.8 kcmil
Stirrups	2-4/0 AWG
Aluminum Color-Coded Lugs and Splices	8-4/0 AWG

CAPACITY (EK628LX)

Copper color-coded connectors	8 AWG to 600 kcmil
Aluminum color-coded connectors	8 AWG to 350 kcmil



INTERCHANGEABLE JAWS FOR EK425 AND EK628

CRIMPING JAWS



CJD30



CJD3BG



CJD3



CJK



CJXPJ

CUTTING JAWS



CJB



CJ-CUAL



CJ-ACSR1

12-TON PISTOL EK1240LX, EK1240CLX, EK1250KLX



EK1240LX



EK1240CLX



EK1240KLX

- Intelli-CRIMP® technology notifies operator with a visual and audible alert in real time if crimp force is not achieved
- Automatic Retraction Stop (ARS) retracts the ram just enough to get ready for the next cycle saving time and energy
- One trigger controls all tool functions
- Crimping head rotates 350°
- EK1240L with 1.65" (42 mm) opening uses Greenlee KC12, KA12 & KD12 crimping dies plus all industry "U" style crimping dies, EK1240KL uses Kearney PH2 style crimping dies
- Covered head models have two layers of PVC that total approximately 3/16" (4.8 mm) thick

SPECIFICATIONS

Crimping Force	12 Tons (106 kN)
Length	16-1/4" (80 mm)
Width	3-1/8" (413 mm)
Height	13-1/2" (343 mm)
Weight	15 lb (6.8 kg)
Capacity	8 AWG – 750 kcmil Cu & Al lugs and splices

CAT NO.	UPC NO.	DESCRIPTION
EK1240LX11	783310609834	12-Ton 42 mm Crimper, 120V Charger, Two 4.0Ah Batteries
EK1240LX12	783310609841	12-Ton 42 mm Crimper, 12V Charger, Two 4.0Ah Batteries
EK1240LX22	783310609858	12-Ton 42 mm Crimper, 230V Charger, Two 4.0Ah Batteries
B EK1240LXB	783310609889	12-Ton 42 mm Crimper, Bare Tool Only

EK1240CLX – PVC BRUSH GUARD

CAT NO.	UPC NO.	DESCRIPTION
EK1240CLX11	783310610342	12-Ton 42 mm Crimper, 120V Charger, Two 4.0 Ah Batteries
EK1240CLX12	783310610359	12-Ton 42 mm Crimper, 12V Charger, Two 4.0 Ah Batteries
EK1240CLX22	783310610366	12-Ton 42 mm Crimper, 230V Charger, Two 4.0 Ah Batteries
B EK1240CLXB	783310610397	12-Ton 42 mm Crimper, Bare Tool Only

EK1240KLX – PVC BRUSH GUARD

CAT NO.	UPC NO.	DESCRIPTION
EK1240KLX11	783310610465	12-Ton 30 mm Crimper, 120V Charger, Two 4.0 Ah Batteries
EK1240KLX12	783310610472	12-Ton 30 mm Crimper, 12V Charger, Two 4.0 Ah Batteries
EK1240KLX22	783310610489	12-Ton 30 mm Crimper, 230V Charger, Two 4.0 Ah Batteries
B EK1240KLXB	783310610519	12-Ton 30 mm Crimper, Bare Tool Only



Crimping Dies for 12-Ton Tools

Crimping dies on page 263

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
A 05167	783310051671	18V 4.0Ah Li-ion Battery
A 52178	783310521785	120V Li-ion Battery Charger
A 52179	783310521792	230V Li-ion Battery Charger
A 52180	783310521808	12V Li-ion Battery Charger
A 12274	783310122746	Carrying Strap

N = NEW PRODUCT

R = REPLACEMENT PART

A = ACCESSORY

B = BARE TOOL

6- AND 12-TON CCX MULTI-TOOLS

E12CCXLX, E6CCXLX



Crimping Dies for 12-Ton Tools

Crimping dies on page 263



Crimping Dies for 6-Ton Tools

Crimping dies on page 262

- Retraction Stop Repeat (RSR) allows the operator to partially retract the ram and then the tool repeats the retraction for subsequent crimps
- Use optional CCX blades and adapters (see page 263)

SPECIFICATIONS

Crimping Force	E12CCXLX – 24,000 lb (107kN) 12-Ton; E6CCXLX – 12,000 lb (53 kN) 6-Ton
Length	E12CCXLX – 16-1/2" (419 mm); E6CCXLX – 15-1/2" (394 mm)
Weight	E12CCXLX – 15 lb (6.8 kg); E6CCXLX – 14 lb (6.3 kg)
Battery	E12CCXLX – 18V 4.0Ah Li-ion; E6CCXLX – 18V 4.0Ah Li-ion

EC12CCXLX

CAT NO.	UPC NO.	DESCRIPTION
E12CCXLX11	783310611462	12-Ton, Multi-Tool, 120V Charger, Two 4.0 Ah Batteries
E12CCXLX12	783310611479	12-Ton, Multi-Tool, 12V Charger, Two 4.0 Ah Batteries
E12CCXLX22	783310611486	12-Ton, Multi-Tool, 230V Charger, Two 4.0 Ah Batteries
B E12CCXLXB	783310611516	12-Ton, Multi-Tool, Bare Tool Only

E6CCXLX

CAT NO.	UPC NO.	DESCRIPTION
E6CCXLX11	783310611585	6-Ton, Multi-Tool, 120V Charger, Two 4.0 Ah Batteries
E6CCXLX12	783310611592	6-Ton, Multi-Tool, 12V Charger, Two 4.0 Ah Batteries
E6CCXLX22	783310611608	6-Ton, Multi-Tool, 230V Charger, Two 4.0 Ah Batteries
B E6CCXLXB	783310611639	6-Ton, Multi-Tool, Bare Tool Only

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
05167	783310051671	18V 4.0Ah Li-ion Battery
52178	783310521785	120V Li-ion Battery Charger
52179	783310521792	230V Li-ion Battery Charger
52180	783310521808	12V Li-ion Battery Charger
12274	783310122746	Carrying Strap

HIGH PRESSURE HOSES



NC-6-38MF
NC-10-38MF
NC-30-38MF

- Comes pre-charged in 6', 10', and 33' lengths
- Standard 3/8" NPT screw type male and female fittings installed
- High pressure – up to 10,000 PSI
- Certified non-conductive
- Double rubber cap comes standard to protect fittings while not in use

CAT NO.	UPC NO.	DESCRIPTION
NC-10-38MF	783310024101	Hose, HYD, 3/8 Male/Female (10')
NC-30-38MF	783310024118	Hose, HYDC, 3/8 Male/Female (10 m)
NC-6-38MF	783310024071	Hose, HYD, 3/8 Male/Female (6')

10,000 PSI HIGH PRESSURE COUPLERS



130868

130878

54169

F024631

F022061

F021627

CAT NO.	UPC NO.	DESCRIPTION
130868	783310406471	Coupler-Hyd Parker #3010-2-542 Male
130878	783310406525	Coupler-Hyd Female 1/4-19 NPSM
54169	783310541691	Coupler-Half 1/4" Male Nipple
F024631	783310420965	Coupler, Female 1/4"-18 NPTM
F022061	783310419419	Coupler-HYD, Male 3/8-18 NPTF
F021627	783310418771	Coupler, Female 3/8"-18 NPTM

IN-LINE CABLE CUTTER

ESC35LX, ESC50LX

- Cutting head rotates 350°
- Tool automatically retracts when the cutting cycle is complete
- Overmolded tacky grip area make gripping the tool easier and more comfortable
- Retraction stop feature reduces time between cuts on smaller wire sizes

NEW



ESC35LX



ESC50LX






SPECIFICATIONS

	ESC35LX	ESC50LX
Height	18" (457 mm)	21" (533 mm)
Width	3" (76 mm)	3" (76 mm)
Length	4.5" (114 mm)	4.5" (114 mm)
Weight	6.6 lb (3 kg)	7.2 lb (3.25 kg)
Capacity	Cuts up to 1.38" diameter Copper (Cu) and Aluminum (Al) Standard/ Fine Stranded Cable	Cuts up to 2" diameter Copper (Cu)/ Aluminum (Al) Standard and Fine Stranded Cable







ESC35LX

CAT NO.	UPC NO.	DESCRIPTION
ESC35LX11	783310613350	35 mm Soft Metal Cable Cutter, 120V Charger, Two 2.0 Ah Batteries
ESC35LX12	783310613367	35 mm Soft Metal Cable Cutter, 12V Charger, Two 2.0 Ah Batteries
ESC35LX22	783310613374	35 mm Soft Metal Cable Cutter, 230V Charger, Two 2.0 Ah Batteries

ESC50LX

CAT NO.	UPC NO.	DESCRIPTION
 ESC50LX11	783310080060	50 mm Soft Metal Cable Cutter, 120V Charger, Two 4.0 Ah Batteries
 ESC50LX12	783310080077	50 mm Soft Metal Cable Cutter, 12V Charger, Two 4.0 Ah Batteries
 ESC50LX22	783310080107	50 mm Soft Metal Cable Cutter, 230V Charger, Two 4.0 Ah Batteries
  ESC50LXB	783310080053	50 mm Soft Metal Cable Cutter, Bare Tool Only

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
 ES35E	783310071891	Cutting Blade (2)
 05167	783310051671	18V 4.0Ah Li-ion Battery
 52178	783310521785	120V Li-ion Battery Charger
 52179	783310521792	230V Li-ion Battery Charger
 52180	783310521808	12V Li-ion Battery Charger
 12274	783310122746	Carrying Strap



COPPER/ALUMINIUM CUTTER

RATCHET STYLE CABLE CUTTER ESR1000LX, ESR25LX

NEW



ESR1000LX

COPPER/ALUMINIUM CUTTER

SPECIFICATIONS

	ESR1000LX	ESR25LX
Height	15" (380 mm)	15" (380 mm)
Width	4/5" (115 mm)	4/5" (115 mm)
Length	7.75" (197 mm)	7.75" (197 mm)
Weight	7.4 lb (3.35 kg)	7.4 lb (3.35 kg)
Capacity	1250 kcmil Cu / 1500 kcmil Al	ACSR: 636 kcmil (Grosbeak) (25 mm) Standard Guy Strand: 5/8" (16 mm)

ESR1000LX

CAT NO.	UPC NO.	DESCRIPTION
N ESR1000LX11	783310079552	Cu/Al Ratchet Cutter with two 18V 4.0Ah Batteries, 120V Charger
N ESR1000LX12	783310079569	Cu/Al Ratchet Cutter with two 18V 4.0Ah Batteries, 12V Charger
N ESR1000LX22	783310079576	Cu/Al Ratchet Cutter with two 18V 4.0Ah Batteries, 230V Charger
N B ESR1000LXB	783310079545	Bare Tool Only – Cu/Al Ratchet Cutter

ESR25LX

CAT NO.	UPC NO.	DESCRIPTION
N ESR25LX11	783310079606	ACSR Ratchet Cutter, 120V Charger, Two 4.0Ah Batteries
N ESR25LX12	783310079613	ACSR Ratchet Cutter, 12V Charger, Two 4.0Ah Batteries
N ESR25LX22	783310079620	ACSR Ratchet Cutter, 230V Charger, Two 4.0Ah Batteries
N B ESR25LXB	783310079590	Bare Tool Only – ACSR Ratchet Cutter

NEW



ESR25LX

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
A 52176	783310521761	18V 4.0Ah Li-ion Battery
A 52178	783310521785	120V Li-ion Battery Charger
A 52179	783310521792	230V Li-ion Battery Charger
A 52180	783310521808	12V Li-ion Battery Charger
A 12274	783310122746	Carrying Strap



10K PSI PUMP

EHP700L



EHP700L



- Capable of powering any high-pressure hydraulic remote head
- Equipped with Intelli-CRIMP® technology to monitor crimping force
- Retraction Stop Repeat (RSR) allows users to teach pump where to start and stop each cycle
- Real-time LED readout permits user to visually monitor pressure cycle
- Job specific crimp, cut, and punch settings
- Mode dial allows for pump to learn new operating cycles
- Dual battery ports – 1 active/1 stored

SPECIFICATIONS

Length	14" (356 mm)
Width	6-1/2" (165 mm)
Height	11-1/2" (292 mm)
Weight	14.1 lb (6.4 kg)
Operating Pressure	10,000 psi (700 bar)

EHP700L

CAT NO.	UPC NO.	DESCRIPTION
EHP700L11	783310007357	Power Pump, Li-ion, STD, 120V
EHP700L12	783310007647	Power Pump, Li-ion, STD, 12V
EHP700L22	783310007654	Power Pump, Li-ion, STD, 230V
EHP700L120	783310007661	Power Pump, Li-ion, STD, 120V AC
EHP700L230	783310007678	Power Pump, Li-ion, STD, 230V AC
B EHP700LB	783310011514	Power Pump, Li-ion, STD, Bare

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
A 52176	783310521761	18V 3.0Ah Li-ion Battery
A 52178	783310521785	120V Li-ion Battery Charger
A 52179	783310521792	230V Li-ion Battery Charger
A 52180	783310521808	12V Li-ion Battery Charger
A TG3	783310010548	Strap
A 25766	783310257660	Adapter, Charger 18V Li-ion to 12V Ni
A EAC18120	783310521914	Adapter, AC – 230V to 18V
A HTA4GL	783310007593	Remote Control
R EL122/32	783310020424	Hydraulic Fluid, Biodegradable
R 17707	783310177074	Hose Assembly, 1/4" X 10' 3/8M & 1/4M Filled
R 05850	783310058502	Hose Assembly, 1/4" X 10' 3/8M & 3/8F Filled
R 01058	783310010586	Hose Assembly, 1/4" X 6' 3/8M & 1/4M Filled
R 01059	783310010593	Hose Assembly, 1/4" X 6' 3/8M & 3/8F Filled



727

Hand-Held Cable Cutter

- Precision-ground, shear-action, curved cutting blades
- 727 has PVC-covered, high-leverage handles for easier cuts
- 727M has cushion grip, high-leverage handles for added comfort
- Heat-treated for long life
- Made of heavy-duty forged steel
- Rust-resistant black oxide finish

SPECIFICATIONS

Maximum Capacity*	Copper: 2/0 (70 mm ²) Aluminum: – Communications Cable: –
Frequent Use Capacity*	Copper: #1 AWG (35 mm ²) Aluminum: 2/0 (70 mm ²) Communications Cable: 100 pair
Length	10-3/4" (273 mm)
Weight	3.6 lb (1.6 kg)

*Capacity may be less for compact and compressed cables



727M

CAT. NO.	UPC NO.	DESCRIPTION
727	783310312918	Cable Cutter
727M	783310126294	Cable Cutter with Molded Grip

Heavy-Duty Manual Communications Cable Cutter

- Forged and heat-treated blades specially designed for communications cable
- Makes clean cuts with minimal distortion on lead, rubber, PVC and polyethylene-sheathed cables
- Blades and handles are replaceable
- Precision-ground, shear-type blades
- Fiberglass handles with non-slip rubber grips

SPECIFICATIONS

Cutting Capacity	2-1/4" (57 mm) Communications Cable (900 pair, 24 AWG)
Length	37" (940 mm)
Weight	7.2 lb (3.3 kg)



765

CAT. NO.	UPC NO.	DESCRIPTION
765	783310060116	Heavy-Duty Communications Cutter
R 05935	783310059356	Cutter Blade (765) (2 required)

WIRE CRIMPING TOOLS



EK50ML138B



Micro Crimping Tool

- Ergonomic; total weight less than 2.2 lb
- Crimp 3x faster with 90% less force
- LED work light
- 65% faster crimping cycle vs. ratcheting tool
- 250 crimps per cycle charge when crimping 10 AWG wire
- Patented Jaw Actuation for crimping cycle
- Innovative trigger with PowerSense™ Technology
- Overmolded grip for maximum comfort
- 10.8V Li-ion battery with charge indicator

SPECIFICATIONS

Weight	2.2 lb (1 kg)
--------	---------------

CAT. NO.	UPC NO.	DESCRIPTION
EK50ML12011	783310031055	Crimping Tool Kit with 12 mm Jaw and 110V Charger with Carrying Case
EK50ML13811	783310031086	Crimping Tool Kit with 13.8 mm Jaw and 110V Charger with Carrying Case
EK50ML12022	783310031239	Crimping Tool Kit with 12 mm Jaw and 230V Charger with Carrying Case
EK50ML13822	783310031246	Crimping Tool Kit with 13.8 mm Jaw and 230V Charger with Carrying Case
EK50ML120B	783310031284	12 mm Jaw EK50ML Bare Tool
R EK50ML138B	783310031307	13.8 mm Jaw EK50ML Bare Tool
R MBP108	783310031277	10.8V EK50ML Li-Ion Battery
R MBC110	783310031253	10.8V EK50ML Li-Ion Battery Charger, 110V
R MBC230	783310031260	10.8V EK50ML Li-Ion Battery Charger, 230V

See page 302 for the complete line of dies.

The EK50ML138 is compatible with all Greenlee Kwik Cycle® dies for various types of cables and sizes.

COMPATIBLE DIE SETS

	WEZAG®	PANDUIT®	THOMAS & BETTS®	IDEAL®
EK50ML120	CS30, CS150	CT-2600, CT-300	Sta-Kon®	-
EK50ML138	-	-	-	Crimpmaster™



K2-1BGL

Kwik Cycle® Crimping Tool

- For non-insulated terminals
- Includes ratchet mechanism which releases only after full crimp cycle is completed

SPECIFICATIONS

Capacity	22-6 AWG
Length	12.8" (325 mm)
Weight	.3 lb (136 g)

CAT. NO.	UPC NO.	DESCRIPTION
K2-1BGL	783310026327	Kwik Cycle® Crimping Tool

WIRE FERRULE CRIMPING TOOLS



K1GL

Wire Ferrule Crimping Tool 26 – 13 AWG

- Makes trapezoidal crimps
- Includes cutter and replaceable stripper blade set

SPECIFICATIONS

Range	26-13 AWG (.14-2.5 mm ²)
Length	6.9" (175 mm)
Weight	.4 lb (0.2 kg)

CAT. NO.	UPC NO.	DESCRIPTION
K1GL	783310026334	Wire Ferrule Crimper



K32GL

Wire Ferrule Crimping Tool 26 – 10 AWG

- Makes trapezoidal crimps with full-cycle ratchet mechanism to assure complete crimps
- Crimps single and twin cable wire ferrules
- Adjusts automatically to correct crimp size

SPECIFICATIONS

Range	Single cable wire ferrules: 26-10 AWG (.14-6 mm ²) Twin wire ferrules: 2 x 20-2 x 13 AWG (2 x .5-2 x 2.5 mm ²)
Length	8.4" (213 mm)
Weight	1.1 lb (.4 kg)

CAT. NO.	UPC NO.	DESCRIPTION
K32GL	783310026372	Wire Ferrule Crimper

FISH TAPES

Case Types



SmartMARK™



Magnum Pro™

SmartMARK™ and MagnumPro

- Advanced comfort grip
- Rugged case design improves drop impact capability
- Superior rapid tape payout and rewind
- Viewing port to show amount of tape remaining and quick debris removal



Reel Stand



Winder

Reel Stand

- Lightweight and portable
- Leaves both hands free

Winder

- Compact
- Winder for quick reeling

Steel Fish Tapes



- For general fishing in conduit
- Durable tapes made from oil-tempered spring steel
- Improved low profile tip for easy fishing through all sizes of conduit
- Maximum design strength: 400 lb (1.7 kN)
- 1/8", 1/4" and flat steel profiles to accommodate different fishing situations
- SmartMARK™ tapes are laser etched with feet and meter markings every 1' (.3 m)
- SmartMARK™ tapes allow you to fish farther and faster with the Speed Flex® leader

CAT. NO.	UPC NO.	LENGTH	WIDTH/ DIAMETER	TYPE	END	REPLACEMENT TAPE
FTS438DL-250	783310263012	250'	1/8"	SmartMark™	Speed Flex® Leader	-
FTS438-240	783310127307	240'	1/8"	MagnumPro	Formed Hook	RS438-240 R
FTS438-240BP	783310100485	240'	1/8"	MagnumPro (3-Pack)	Formed Hook	RS438-240 R
S438W-200	783310124764	200'	1/4"	No Case	Formed Hook	-
FTS438DL-150	783310262992	150'	1/8"	SmartMark™	Speed Flex® Leader	-
FTS438-125	783310127093	125'	1/8"	MagnumPro	Formed Hook	RS438-125 R
FTS438-125BP	783310100461	125'	1/8"	MagnumPro (3-Pack)	Formed Hook	RS438-125 R
FTS438W-100	783310127109	100'	1/4"	MagnumPro	Formed Hook	RS438W-100 R
FTS438-65	783310127291	65'	1/8"	MagnumPro	Formed Hook	RS438-65 R
FTS438-65BP	783310100287	65'	1/8"	MagnumPro (3-Pack)	Formed Hook	RS438-65 R
438-5H	783310075004	50'	1/8"	5-Pack	Formed Hook	-
438-2X	783310016960	25'	1/4"	Flat-Steel Tape (3-Pack)	Plastic-Tipped	-



591

Mighty Mouser® Portable Blower Power Fishing System

- Powerful, will blow line or measuring tape in up to 6" conduit
- Portable, lightweight blower has shoulder strap to make it easy to carry and allow the operator to have both hands free
- Efficient, includes the Mighty Mouser® blow gun for fast, easy line blowing

SPECIFICATIONS

Capacity	1/2" – 4" Conduit (5" and 6" with optional foam pistons)
Power Source	120 VAC 20 Amp
Weight	34 lb (15.2 kg)

CAT. NO.	UPC NO.	DESCRIPTION
591	783310324324	Portable Blower Power Fishing System
A 618	783310165170	Piston for 5" Conduit
A 619	783310169512	Piston for 6" Conduit
A 16646	783310166467	Adapter for 5" – 6" conduit

*See next page for parts list.



592

Mighty Mouser® Blow Gun Kit

- This compact, self-contained Lexan® thermoplastic blow gun holds a 2,150' (655 m) package of 85 lb (378 N) breaking strength fish line
- Compact self-contained unit leaves one hand free for more efficient operation
- Mighty Mouser® Blow Gun and Accessories all fit into a compact sturdy metal case

SPECIFICATIONS

Capacity	1/2"- 4" conduit, through 6" with additional optional accessories
Power Source	Use with blower power fishing systems
Weight	592: 20 lb (9 kg) 691: 1.7 lb (0.8 kg)

CAT. NO.	UPC NO.	DESCRIPTION
592	783310325659	Mighty Mouser® Blow Gun Kit for 1/2" – 4" Conduit in metal box
R 691	783310320951	Mighty Mouser Blow Gun (only)
A 595	783310324331	Fish Line – 85 lb (378 N) pulling strength; 2,150' (655 m) long
A 618	783310165170	Piston for 5" Conduit
A 619	783310169512	Piston for 6" Conduit
A 16646	783310166467	Adapter for 5" – 6" conduit

FISH LINE



595

Lightweight Fish Line

- Strong, lightweight nylon
- Specially wound to payout fast from outside without tangles
- Mildew-resistant, can be pulled into the run with the wire to provide a means to add wires later
- 595 is designed to be used with the Mighty Mouser® blow gun

CAT. NO.	UPC NO.	STRENGTH		LENGTH	
		LB	N	FT	M
595	783310324331	85	378	2150	655
604	783310233688	85	378	2200	670
605	783310165040	45	200	2750	838
606	783310165057	72	320	1700	517
607	783310165064	90	400	1350	411



430

430-500 Poly Line

Poly Line

- Pre-punched lid with resalable cap allows use directly from container
- Use with power fishing systems directly from the container
- Rot and mildew resistant line reduces tangling when dispensing
- Handy reusable plastic dispenser pail with handle keeps the line dry
- Use to pull rope through conduit

CAT. NO.	UPC NO.	TRACER COLOR	STRENGTH		LENGTH	
			LB	N	FT	M
430	783310214816	Green	210	934	6500	1981
430-500	783310125983	Green	210	934	500	152
431	783310214823	Yellow	240	1067	5200	1585
37959	783310379591	-	500	2224	2200	670



435 Measuring Tape shown on
434 Dispenser – sold separately

Polyester Measuring Tape and Dispenser

- Fish and measure conduit runs in one operation
- Permanently printed measurements every foot from zero to 3000' (914 m)
- Made of strong, waterproof polyester
- Pay-out dispenser has anti-skid pads, handle and built-in cutter

SPECIFICATIONS

Size	3000' (914 m)
Capacity	170 lb (756 kN) average breaking strength
Weight	435: 4.4 lb (2.0 kg), 434: 3.5 lb (1.6 kg)

CAT. NO.	UPC NO.	DESCRIPTION
435	783310215622	Conduit Measuring Tape 3/16" x 3000' (4.8 mm x 914 m)
434	783310218753	Pay-Out Dispenser for 435 Conduit Measuring Tape



Super-Tugger® Cable Puller: 6500 lb (28.9 kN) rated

- Pull up to 6,500 lb (28.9 kN) with less than 27 lb (120 N) of operator effort
- Unique floor mounting attachment for quick, reliable setup
- Leaf-type mounting chains won't twist when tightening
- Heat-treated steel serrated gripper feet for secure mounting to conduit
- Right-angle sheave allows the operator to stand out of the direct line of force
- Audio alarm high force warning and circuit breaker shut off at maximum force for added safety
- Tapered capstan and patented rope guidance system for better control of the rope when feeding onto the capstan

SPECIFICATIONS:

Pulling Force	Maximum: 6,500 lb (28.9 kN) Continuous: 4,500 lb (20 kN)
Dimensions	Length: 20-3/4" (527 mm) Width: 22-1/2" (572 mm) Height: 12" (305 mm)
Weight	6001, 6001-22: 108 lb (49 kg) 6003: 454 lb (206 kg) 6000, 6000-22: 550 lb (250 kg) 6006, 6006-22: 612 lb (278 kg)
Pulling Speed – Feet (Meters) Per Minute:	No Load: 16.5 (5) At 2000 lb: (8.8 kN) – 11 (3.4) At 4000 lb: (17.9 kN) – 7.5 (2.3) At 6000 lb: (26.7 kN) – 6 (1.8)
Drive Motor	1-1/2 HP (1.1 kW)
Power Requirements	6001, 6004, 6005: 120 VAC 16Hz 20A 6001-22: 220 VAC 50Hz
Required Rope	3/4" (19.1 mm) Double-Braided Composite – Rated at 26,000 lb (115.6 kN)



CAT. NO.	UPC NO.	DESCRIPTION
6001	783310296270	Super Tugger Cable Puller Power Unit, Includes force gauge and vise chains
6001-22	783310314660	Same as 6001 except 220 VAC 50 HZ
6004	783310563587	Super Tugger Complete Puller Package, Includes 6001 Super Tugger, Floor Mount, Mobile Carriage, Boom Mount, 4' Boom Tube, Nose Unit, 2 1/2", 3", 3 1/2", 4" Slip-in and Screw-On Couplings & Storage Trays
6005	783310563594	Super Tugger Complete Puller Package, Includes 6001 Super Tugger, Floor Mount, Mobile Carriage, Boom Mount, 4' Boom Tube, Nose Unit, 3' Boom Tube, Elbow Unit, 2 1/2", 3", 3 1/2", 4" Slip-in and Screw-On Couplings and Storage Trays
A 35098	783310350989	Double-Braided Composite Rope 3/4" x 300' (19.1 mm x 91 m)
A 35100	783310351009	Double-Braided Composite Rope 3/4" x 600' (19.1 mm x 182 m)
A 35101	783310351016	Double-Braided Composite Rope 3/4" x 1,200' (19.1 mm x 365 m)
A 3048	783310233626	Storage Box
A 11147	783310111474	Ultra Tugger® 640/6001 Adapter Package Includes wheeled carriage, 4 ft (1.2 m) boom, boom adapter, nose unit, 2-1/2", 3" and 4" slip-in couplings and 2", 3" and 4" screw-on couplings

Conveyor Sheaves – 4,000 lb Capacity

- Aluminum frame with a series of sheaves to form a large radius
- Yokes with cast steel closure-type hooks with a 1" (25.4 mm) opening
- 5" (127 mm) wide aluminum alloy sheaves
- Use with any cable puller with maximum pulling force of 4,000 lb (17.8 kN) or less

SPECIFICATIONS

Maximum Pulling Force	4,000 lb (17.8 kN)
Weight	4024: 54 lb (24.5 kg) 4036: 60 lb (27 kg) 4048: 83 lb (38 kg)

CAT. NO.	UPC NO.	DESCRIPTION
4024	783310263685	24" (609.6 mm) Conveyor Sheave with 6 sheave wheels
4036	783310263692	36" (914.4 mm) Conveyor Sheave with 8 sheave wheels
4048	783310263708	48" (1219 mm) Conveyor Sheave with 10 sheave wheels
R 19185	783310191858	Yoke frame
R 15362	783310153627	Sheave w/bearings
R 19186	783310191865	Sheave Pin
R 31573	783310315735	Sheave Pin



Triple Sheave Cable Guide – 6,500 lb Capacity

- Adjustable center sheave for 19-1/2" (495 mm) or 36" (914 mm) radius
- Forged steel closure type hook with 1-1/2" (38.1 mm) opening
- Aluminum frames for light weight
- Steel yoke is pinned for easy removal
- 21-7/8" (555 mm) high, 24" (610 mm) long, 7-3/8" (187 mm) wide with 5" (127 mm) wide sheaves
- Use with any cable puller with maximum pulling force of 6,500 lb (28.9 kN) or less

SPECIFICATIONS

Maximum Rated Capacity	6,500 lb (28.9 kN)
Weight	28 lb (12.7 kg)

CAT. NO.	UPC NO.	DESCRIPTION
6036	783310315698	Triple Sheave Cable Guide

SHEAVE	6036		
	DESCRIPTION	CAT. NO.	UPC NO.
Sheave Axle	31573	783310315735	3
Sheave Bolt Washer	51434	783310514343	6
Sheave Pin	29600	783310296003	1
Sheave Bushing	16798	783310167983	6
Sheave	15362	783310153627	3

Sheave Bolt is a 3/8"-24 x 3/4" hex head socket head cap screw (grade 5) and is available at most hardware stores.



CABLE TRAY FEEDER & ACCESSORIES




CTF-200

CTF-200

- Quick clamping onto cable, can handle up to 2" (50.8 mm) in outer cable diameter
- 360° swivel pins to easily release cable from all sides with no loose pieces
- Designed specifically to handle electrical cable with 5 grooves to grab cable safely and evenly
- Pre set to aid up to 200 lb (90.7 kg) of force to prevent damage to the insulation of the cable
- Quickly adjust legs and feeder into position utilizing no loose pieces
- Control feeder up to 8' (2.4 m) away with pendant
- Quick set up utilizing a ratchet strap to securely mount to tray

CAT. NO.	UPC NO.	DESCRIPTION
CTF-200	783310036449	Cable Tray Feeder

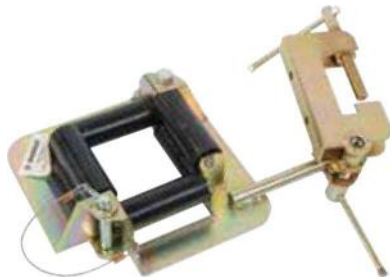

CR25


CR25

- Six nylon rollers provide smooth movement of cable and prevent cable damage
- Pull pin makes opening and closing to insert and remove cables a simple one step operation
- Adjustment clamp allows the CR25 to be swiveled and/or rotated into any position
- Heavy duty 12 gauge cold rolled steel construction for durability and zinc dichromate finish prevents corrosion
- Up to 20 network cables can be pulled at one time
- Easily attaches to wooden framing members using a lag bolt and the hole in the mounting bracket of the CR25
- May also be used with coax, NM, small size THHN, and similar cables

SPECIFICATIONS

Roller Opening Size	3" (76 mm) square
Weight	2 lb (1 kg)

CAT. NO.	UPC NO.	DESCRIPTION
CR25	783310122111	Cable Roller Guide

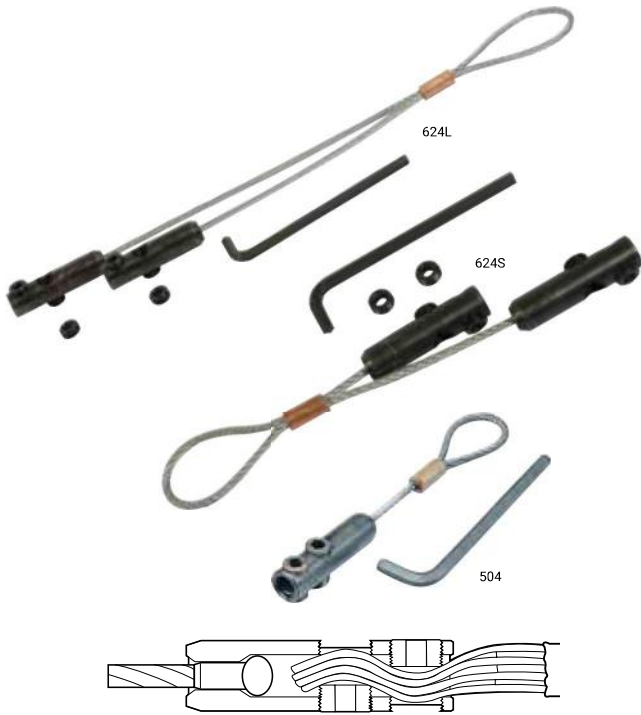

Each grip has two opposed set screws that provide positive locking. Openings in wire grip should be 50% filled with wire to assure slip-proof grip.

Set Screw Clamp Pulling Grips

- Use to pull in 2" (50.8 mm) or larger conduit
- Type of pulls: heavy, long runs (629)
- Type of pull: light and medium (504)
- Type of grip: Flexible eye 1/4" (6.4 mm–629) (6.3 mm–504) diameter galvanized steel aircraft cable connected to 2 cable receptacles with 5/8" (15.9 mm) diameter opening and 2 clamping set screws
- Select pulling grips with a maximum-rated capacity that meets or exceeds the cable puller's maximum pulling force
- Minimum cable diameter is 3/8"

Maximum Rated Capacity	Weight
504: 1,750 lb (28.9 kN)	504: 5 lb (2.3 kg)
629: 6,500 lb (28.9 kN)	629: 5 lb (2.3 kg)
624: 6,500 lb (28.9 kN)	624: 3.5 lb (1.5 kg)
624S: 3,250 lb (14.5 kN)	624S: 2 lb (.9 kg)
624L: 3,250 lb (14.5 kN)	624L: 2.1 lb (1 kg)

SPECIFICATIONS

Capacity	1,750 lb (7.7 kN)
Weight	1.2 lb (.5 kg)
Size	Receptacle – 5/8" (15.9 mm)

CAT. NO.	UPC NO.	DESCRIPTION
504	783310236658	Set Screw Clamp-Type Pulling Grip
629	783310318552	Pulling Grip with Clevis includes 624S, 624L and 678 clevis – 4 Clamp
624	783310319085	Pulling Grip includes 624S and 624L – 2 Clamp each
624S	783310318668	Short Pulling Grip – 2 Clamp
R 624L	783310318675	Long Pulling Grip – 2 Clamp
R 51208	783310512080	Grip Allen Wrench
R 52352	783310523529	Grip Set Screw (2 per clamp), 629 and 624 – 8 for each grip 624L and 624S – 4 for each grip.



Cable Preparation Instructions for Set Screw Clamp-Type Pulling Grips

- Strip cable approximately 3" (76 mm) of insulation off the end of the cable to be pulled. **NOTE:** The grip head should not be more than 60% filled nor less than 40% filled to assure that the set screw does not project above the surface of the grip body when the set screws are tightened down
- The central core should be clipped away and the outer strands used in the grip head
- Using the Allen Wrench provided, back out the set screws far enough to accommodate the stripped cables
- Insert the bare wire strands into the grip head as far as they will go
- Tighten both set screws in each grip securely against the conductors
- **CAUTION:** If the set screws extend above the surface of the gripping head, damage to the conduit could result. To prevent this, wrap the head with electrical tape.



CRM-5

CRM-Q

CRM-1



Cable-Cream™ Cable Pulling Lubricant

- Advanced formula, light yellow cream makes pulling faster and easier
- Compatible with all cable insulation types
- Dries slowly to a thin, non-conductive, non-hardening residue
- Adheres well to the cable without messy dripping; Reduces waste
- Cleans up easily and is non-staining
- Won't break down or separate after exposure to freezing cold or blistering heat
- Environmentally friendly and non-corrosive
- Ideal for hot weather environment

SPECIFICATIONS

Weight	CRM-Q: 2.3 lb (1 kg) CRM-5: 42 lb (19.1 kg) CRM-1: 9.5 lb (4.3 kg)
Viscosity	30,000 – 45,000 CPS
PH Range	7.0 – 8.0
Average COF	0.11

CAT. NO.	UPC NO.	DESCRIPTION
CRM-Q	783310352075	Cable-Cream One Quart Squeeze Bottle (.95 l)
CRM-1	783310352082	Cable-Cream One Gallon (3.79 l)
CRM-5	783310352099	Cable-Cream 5 Gallons (18.93 l)



GEL-5

GEL-Q

GEL-1



Cable-Gel™ Cable Pulling Lubricant

- Polymer-based, no silicon lubricant offers lower friction and easier pulling
- Compatible with all cable insulation types
- Cleans up quickly. Non-staining
- Higher lubricity than competitive products
- Will not cement itself to the pipe
- Dries slowly
- Can be applied by hand or pump
- Will not break down or separate after exposure to heat or cold
- Environmentally friendly and non-corrosive
- Ideal for indoor environment

SPECIFICATIONS

Weight	GEL-Q: 2.3 lb (1 kg) GEL-1: 8.5 lb (3.9 kg) GEL-5: 45 lb (20.4 kg) GEL-55: 498 lb (225.9 kg)
Viscosity	8,000 – 12,000 CPS
PH Range	7.0 – 8.0
Average COF	0.18

CAT. NO.	UPC NO.	DESCRIPTION
GEL-Q	783310352112	Cable-Gel One Quart Squeeze Bottle (.95 l)
GEL-1	783310352129	Cable-Gel One Gallon (3.79 l)
GEL-5	783310352136	Cable-Gel 5 Gallons (18.93 l)



Long Nose Side-Cutting & Stripping Pliers

- Forged from chrome vanadium steel for greater strength and long life
- Laser hardened cutting edge lasts longer than induction hardened edge
- Designed to provide long life even when cutting hardened wire
- Serrated jaws for stronger gripping power
- Stripping hole allows stripping of #12 AWG solid wire (0351-08SM and 0351-08SD)
- Meets ASME/ANSI specifications



MOLDED GRIP PLIERS

CAT. NO.	UPC NO.	DESCRIPTION	OVERALL LENGTH
0351-06M	783310547174	6" Long Nose Pliers/Side-Cutting	6-5/8" (16.8 cm)
0351-08M	783310547198	8" Long Nose Pliers/Side-Cutting	8-9/16" (21.7 cm)
0351-08SM	783310209584	8" Long Nose Pliers/Stripping	8-9/16" (21.7 cm)



DIPPED GRIP PLIERS

CAT. NO.	UPC NO.	DESCRIPTION	OVERALL LENGTH
0351-07D	783310892526	7" Long Nose Pliers/Side-Cutting	7-1/8" (18.1 cm)
0351-08SD	783310209577	8" Long Nose Pliers/Stripping	8-9/16" (21.7 cm)



Pump Pliers

- Forged from chrome vanadium steel for greater strength and longer life of the whole tool
- Precision-machined and hardened teeth for durability and long life
- Right-angled teeth for assured gripping power from both directions
- Meets ASME/ANSI specifications



0451-10M

SPECIFICATIONS

	0451-10M	0451-12M
Jaw Capacity	2" (5.1 cm)	2-1/4" (5.7 cm)
Adjustment Grooves	7	7
Overall Length	10" (25.4 cm)	12" (30.5 cm)

MOLDED GRIP PLIERS

CAT. NO.	UPC NO.	DESCRIPTION
0451-10M	783310547099	10" Pump Pliers
0451-12M	783310547440	12" Pump Pliers



0451-16D

SPECIFICATIONS

	0451-10D	0451-12D	0451-16D
Jaw Capacity	2" (5.1 cm)	2-1/4" (5.7 cm)	4-1/4" (10.8 cm)
Adjustment Grooves	7	7	8
Overall Length	10" (25.4 cm)	12" (30.5 cm)	16" (40.6 cm)

DIPPED GRIP PLIERS

CAT. NO.	UPC NO.	DESCRIPTION
0451-10D	783310892595	10" Pump Pliers
0451-12D	783310892601	12" Pump Pliers
0451-16D	783310547075	16" Pump Pliers

WIRE STRIPPING TOOLS



Wire Strippers

- Cutlery grade stainless steel prevents wear and corrosion to provide 5x longer life
- Pliers grab, form and bend wires
- Precision-ground strippers engineered for clean, easy insulation removal
- Double-layered vinyl handles for comfort and slip resistance



1950-SS



1955-SS



1956-SS

Stainless Steel Wire Stripper/Cutter/Crimper

- Bolt threaders clean threads after shearing
- Professional, multi-function tool includes a crimper, looper, non-obstructive lock mechanism, spring return, and high grade shears

CAT. NO.	UPC NO.	DESCRIPTION	SOLID STRIP	STRANDED STRIP	BOLT SHEAR	CRIMP
1950-SS	783310022411	Pro Stainless Wire Stripper / Cutter / Crimper	10-18	12-20	6-32, 8-32	16-10
1955-SS	783310013617	Pro Stainless Wire Stripper / Cutter / Crimper (Curve)	10-18	12-20	6-32, 8-33	16-10
1956-SS	783310022428	Pro Stainless Wire Stripper / Cutter / Crimper (Curve)	6-14	8-16	6-32, 8-34	16-10



1916-SS



1917-SS

Stainless Steel Wire Stripper/Cutter

- Multi-function tool includes a looper, non-obstructive lock mechanism, spring return, and high grade shears

CAT. NO.	UPC NO.	DESCRIPTION	SOLID STRIP	STRANDED STRIP
1916-SS	783310013594	Stainless Wire Stripper / Cutter	10-20	12-22
1917-SS	783310013600	Stainless Wire Stripper / Cutter	16-26	18-28

SCREWDRIVERS



Screwdriver Sets

- Heavy-duty construction for longer life
- Handle marked for easy identification of screwdriver size, type and length
- Precision-machined tips for accurate fastener contact
- Strong, durable black phosphate tips prevent chipping of plating
- High-grade, rust resistant, chrome-plated finish
- Cushion grip handle for extra comfort and torque



0153-02C

7-Piece Screwdriver Set

- Set includes:
 - 3/16" x 4" Cabinet
 - 3/16" x 6" Cabinet
 - 1/4" x 4" Keystone
 - 1/4" x 4" Cabinet
 - 5/16" x 6" Keystone
 - #1 x 3" Phillips
 - #2 x 4" Phillips

CAT. NO.	UPC NO.	DESCRIPTION
0153-02C	783310546610	7-Piece Screwdriver Set



0153-01C

5-Piece Screwdriver Set

- Set includes:
 - 3/16" x 6" Cabinet
 - 1/4" x 4" Keystone
 - 1/4" x 6" Cabinet
 - 5/16" x 6" Keystone
 - #2 x 4" Phillips

CAT. NO.	UPC NO.	DESCRIPTION
0153-01C	783310563037	5-Piece Screwdriver Set



0153-03C

Mini Screwdriver Set

- Set includes:
 - #0 Phillips
 - 1/16" Keystone
 - 3/32" Cabinet
 - 1/8" Cabinet


CAT. NO.	UPC NO.	DESCRIPTION
0153-03C	783310134381	4-Piece Mini Screwdriver Set (Round Shank)



11-IN-1 MULTI-DRIVER



MULTI-FUNCTIONAL SCREWDRIVER & NUTDRIVER

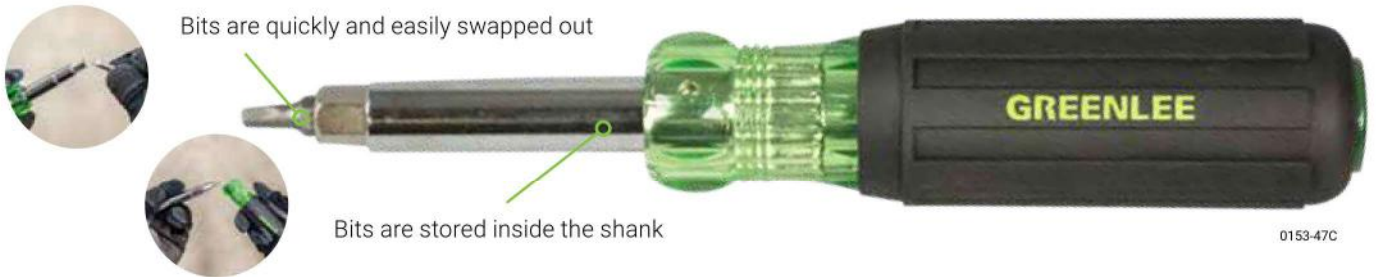NEW



SPECIFICATIONS

Overall Length	7.94"	
Shank Length	1.97"	
Handle Length	4.92"	
Bits	Phillips #1 Flat 3/16" Square #1 Phillips #1 Torx #10	Phillips #2 Flat 1/4" Square #2 Phillips #2 Torx #15
Sockets	Nut Driver 1/4" Nut Driver 5/16" Nut Driver 3/8"	

CAT. NO.	UPC NO.	DESCRIPTION
 0153-47C	783310083634	Multi-Tool, 11-in-1
 9953-20	783310083641	Bit Set, Replacement

HEX KEY



0254-40

T-Handle Hex-Key Drivers

- Heat-treated and tempered for extra strength and durability
- Ergonomic molded grips for max torque & comfort
- Ball-end design allows for angled use up to 30 degrees
- Square-cut end for high torque applications
- Meets ASME/ANSI specifications
- Set includes:
 - 3/32" • 3/16"
 - 7/64" • 7/32"
 - 1/8" • 1/4"
 - 9/64" • 5/16"
 - 5/32" • 3/8"

CAT. NO.	UPC NO.	DESCRIPTION
0254-40	783310134992	T-Handle Wrench Set, 10-piece set
0254-42	783310135005	T-Handle Wrench, 3/32"
0254-43	783310135012	T-Handle Wrench, 7/64"
0254-44	783310135029	T-Handle Wrench, 1/8"
0254-45	783310135036	T-Handle Wrench, 9/64"
0254-46	783310135043	T-Handle Wrench, 5/32"
0254-47	783310135050	T-Handle Wrench, 3/16"
0254-48	783310135067	T-Handle Wrench, 7/32"
0254-49	783310135074	T-Handle Wrench, 1/4"
0254-50	783310891871	T-Handle Wrench, 5/16"
0254-51	783310891970	T-Handle Wrench, 3/8"



0254-11

9-Piece Folding Hex-Key Set – Standard

- One-piece, powder-coated handle/case for corrosion resistance
- Laser-etched sizes on case for easy identification
- Heat-treated and tempered for extra strength and durability
- Meets ASME/ANSI specifications
- Set includes:
 - 5/64" • 5/32"
 - 3/32" • 3/16"
 - 7/64" • 7/32"
 - 1/8" • 1/4"
 - 9/64"

CAT. NO.	UPC NO.	DESCRIPTION
0254-11	783310563235	9-Piece Folding Hex-key Set: Sizes Include: 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32" & 1/4"
0254-31	783310892670	9-Piece Folding Hex-Key Set (Metric): Contains Sizes: 1.5, 2, 2.5, 3, 4, 5, 6, 8, and 10 mm

CUTTING TOOLS



Knives

- Easy front-loading design allows for quick blade change
- Quick-change locking blade holder and lock-back feature for added safety and convenience
- Uses standard utility blades



Utility Knife

- Over-molded for secure, comfortable grip
- Retractable three-position blade for added safety and convenience
- Blade storage in pop-up holder
- Packaged with heavy-duty patented serrated blades (Cat # 9952-11)

CAT. NO.	UPC NO.	DESCRIPTION
0652-11	783310547297	Utility Knife with blades
R 9952-11	783310563013	Blades for 0652-11 Utility Knife, 5 pack



Folding Utility Knife

- Over-molded for secure, comfortable grip
- High finish stainless steel handle

CAT. NO.	UPC NO.	DESCRIPTION
0652-22	783310000419	Folding Utility Knife



Heavy-Duty Folding Utility Knife

- Heavy-duty aluminum housing with built-in blade storage for added convenience
- Thumb pad allows safer hand position to apply extra cutting force comfortably
- Includes storage pouch and 5 extra blades

CAT. NO.	UPC NO.	DESCRIPTION
0652-23	783310000433	Heavy-Duty Folding Utility Knife

TOOL BAGS, POUCHES & BELTS



0158-27

Professional Tool & Tech Backpack

- Customize your bag with a personalized embroidered name plate (see hang tag for instructions)
- 27 universal double stitched pockets
- Two separate zippered compartments for easier tool organization – second zippered compartment that allows for storage of laptop/tablet
- S-Strap shoulder strap and padded lumbar support helps reduce back strain and distributes weight evenly

CAT. NO.	UPC NO.	DESCRIPTION
N 0158-26	783310064060	Professional Tool Backpack
N 0158-27	783310064077	Professional Tool & Tech Backpack



0158-21

20" Heavy-Duty Multi-Pocket Tool Bag

- 28 universal double stitched pockets – one see-through pocket for easy tool access
- Removable adjustable reinforced shoulder strap makes carrying your tools more comfortable
- Metal hanger holds tape for quick and easy access
- Thermoformed molded safety pocket keeps safety glasses and other valuables protected in the work environment

CAT. NO.	UPC NO.	DESCRIPTION
N 0158-21	783310064084	20" Heavy-Duty Multi-Pocket Tool Bag



0158-22

18" Heavy-Duty Multi-Pocket Tool Bag

- 19 universal double stitched pockets – one see-through pocket for easy tool access
- Removable, adjustable, reinforced shoulder strap makes carrying your tools more comfortable
- Metal hanger holds tape for quick and easy access
- Thermoformed molded safety pocket keeps safety glasses and other valuables protected in the work environment

CAT. NO.	UPC NO.	DESCRIPTION
N 0158-22	783310064091	18" Heavy-Duty Multi-Pocket Tool Bag



**17
PIECES**

0159-17ELEC

11" Electrician's Open Tool Carrier Kit

- 27 universal double stitched pockets
- Lightweight rigid PE support structure gives solid support and protection
- Impact resistant plastic molded handle provides centered alignment and balanced carrying
- Metal hanger holds tape for quick and easy access
- Extended molded plastic feet protects bottom of bag in the work environment
- Removable adjustable reinforced shoulder strap makes carrying your tools more comfortable
- Metal clip for attaching measuring tape
- Set includes:
 - 11" Electrician's Open Tool Carrier
 - Non-Contact Voltage Detector
 - Torpedo Level
 - 18 oz Electricians Hammer
 - 25' Power Return Rule
 - Keystone Tip Flat-Blade Screwdriver – 1/4" x 4"
 - Cabinet Tip Flat-Blade Screwdriver – 3/16" x 6"
 - Phillips Tip Screwdriver – #1 x 3"
 - Phillips Tip Screwdriver – #2 x 4"
 - 9" Side-Cutting Pliers – Molded Grip
 - 8" Diagonal Pliers – Molded Grip
 - 8" Long Nose Pliers – Molded Grip
 - 10" Pump Pliers – Molded Grip
 - Pro Stainless Wire Stripper – 10-18 AWG
 - Non-Metallic Cable Ripper
 - Stainless Stripping/Crimping Comb Tool
 - Cable Cutter

CAT. NO.	UPC NO.	DESCRIPTION
N 0159-17ELEC	783310073871	11" Electrician's Open Tool Carrier



**16
PIECES**

0159-24

Electrician's Tool Kit – Metric

- Perfect kit for the professional or apprentice electrician
- Set includes:
 - Heavy-Duty 8 Pocket Leather Pouch
 - Heavy-Duty Leather Tool Belt
 - 9" High-Leverage Side Cutting Pliers – Molded Grip
 - 8" High-Leverage Diagonal Cutting Pliers – Molded Grip
 - 8" High-Leverage Long Nose Pliers/Side Cutting – Molded Grip
 - 10" Pump Pliers – Molded Grip
 - Keystone Tip Flat-Blade Screwdriver – 1/4" x 4"
 - Cabinet Tip Flat-Blade Screwdriver – 3/16" x 6"
 - Phillips Tip Screwdriver – #1 x 3"
 - Phillips Tip Screwdriver – #2 x 4"
 - 25' Tape measure
 - Pro Plus Wire Stripper 10-18 AWG
 - 4-Piece Square Tip Screwdriver Set

CAT. NO.	UPC NO.	DESCRIPTION
0159-24	783310892397	Electrician's Tool Kit – Metric, 16-Piece

PERSONAL PROTECTIVE EQUIPMENT



0358-13L



0358-14LS

Gloves

- Professional quality, high dexterity gloves
- Light-duty Nitrile dipped gloves for resistance to abrasion, punctures and improved grip

CAT. NO.	UPC NO.	DESCRIPTION
0358-13L	783310001171	Gloves, Handyman L
0358-13XL	783310001188	Gloves, Handyman XL
0358-14L	783310001201	Gloves Tradesman L
0358-14XL	783310001218	Gloves Tradesman XL



Tradesman Clear



Pro-View Mirror

Safety Glasses

- Several styles of ANSI compliant eye wear to meet the varied needs and tastes of the trade professional
- 2 models with clear lenses for all-around activities
- REVO mirror lens for ultimate style and protection
- Overwrap-style to fit over prescription glasses or for visitors

CAT. NO.	UPC NO.	DESCRIPTION
01762-01C	783310001812	Safety Glasses, Tradesman, Clear
01762-04M	783310001980	Safety Glasses, Pro View, Mirror
01762-06C	783310002000	Safety Glasses, Frameless, Clear
01762-07C	783310002017	Safety Glasses, Over-wrap, Clear



Overwrap Clear



Frameless Clear

Cordura is a registered trademark for E.I. du Pont de Nemours and Company.
 Romex is a registered trademark of Southwire Company.
 SOG is a registered trademark of SOG Specialty Knives and Tools, LLC.
 Torx is a registered trademark of ACUMENT INTELLECTUAL PROPERTIES, LLC.

BATTERY-HYDRAULIC KITS WITH SLUG-BUSTER® PUNCHES



LS100X11SB4

LS100X INTELLI-PUNCH™ 11-TON BATTERY-HYDRAULIC KNOCKOUT KITS

CAT NO.	UPC NO.	DESCRIPTION
LS100X11SB4	783310064848	Slug-Buster® 1/2" to 4" Conduit
LS100X11SB4X	783310064855	Slug-Buster® 1/2" to 3" and 4" Conduit
LS100X11SB	783310064831	Slug-Buster® 1/2" to 2" Conduit
LS100X11A	783310064824	Driver, Draw Studs, Batteries, Charger and Case
LS100XB	783310064817	Driver and Case Only
N LS100X	783310088059	Driver Only



LS50L11B4

LS50L2 7-TON BATTERY-HYDRAULIC KNOCKOUT KITS

CAT NO.	UPC NO.	DESCRIPTION
N LS50L11B4	783310037743	Slug-Buster® 1/2" to 4" Conduit
LS50L11B	783310049562	Slug-Buster® 1/2" to 2" Conduit
LS50L11A	783310049517	Driver, Draw Studs, Battery, Charger and Case
LS50LB	783310011316	Driver and Case Only
N LS50L2	783310088042	Driver Only



7304



LARGE DIAMETER KNOCKOUT EXPANSION SET

CAT NO.	UPC NO.	DESCRIPTION
7304	783310028154	Standard Round 2-1/2", 3", 3-1/2" and 4" Conduit

Upgrade your knockouts and case to fit your existing manual-hydraulic ram and hand pump driver.



KCC4-LS



Fits Greenlee LS50L2 or LS100X tool, two batteries and a charger

KNOCKOUT UPGRADE SETS FOR BATTERY-HYDRAULIC DRIVERS

CAT NO.	UPC NO.	DESCRIPTION
N KCC4-LS	783310088028	Slug-Buster® 1/2" to 4" Conduit
N KCC2-LS	783310088004	Slug-Buster® 1/2" to 2" Conduit

QUICK DRAW[®] MANUAL-HYDRAULIC KITS WITH SLUG-BUSTER[®] PUNCHES



Quick Draw[®] 8-Ton Manual-Hydraulic Drivers

- 8 tons of punching force
- Compact Design – for portability and fast, easy one-person operation
- Punch 2" conduit up to 10 ga mild steel and 12 ga stainless steel
- Also punches brass, copper, aluminum, fiberglass and plastics

Quick Draw 90[®]

- 180° Rotating Head – Right angle driver head rotates over 180° for maneuverability in tight work areas



QUICK DRAW 90[®] 8-TON HYDRAULIC KNOCKOUT KITS

CAT. NO.	UPC NO.	DESCRIPTION
7906SB	783310343004	Slug-Buster [®] 1/2" to 2"
7904SB	783310337942	Driver, Draw Studs and Case Only



Quick Draw[®]

- Fast, straight-on punching

QUICK DRAW[®] 8-TON HYDRAULIC KNOCKOUT KITS

CAT. NO.	UPC NO.	DESCRIPTION
7806SB	783310342939	Slug-Buster [®] 1/2" to 2"
7804SB	783310342922	Driver, Draw Studs and Case Only



Quick Draw[®] Flex

- Flex head allows for maximum flexibility in tight working areas

QUICK DRAW[®] FLEX 8-TON HYDRAULIC KNOCKOUT KITS

CAT. NO.	UPC NO.	DESCRIPTION
7706SB	783310104766	Slug-Buster [®] 1/2" to 2"
7704SB	783310104759	Driver, Draw Studs and Case Only

Upgrade your knockouts and case to fit your existing Quick Draw 90[®] or Quick Draw[®] drivers.



KCC2-QD

Fits Greenlee Quick Draw[®] or Quick Draw c90[®] Driver

KNOCKOUT UPGRADE SETS FOR QUICK DRAW DRIVERS

CAT. NO.	UPC NO.	DESCRIPTION
KCC2-QD	783310087984	Slug-Buster [®] 1/2" to 2" Conduit

HYDRAULIC C-FRAME KITS

- Fast, one-shot punching – eliminates need for pilot hole
- Throat measures 8" (203 mm) deep
- Punch up to 10 ga mild steel



1731

1731 HYDRAULIC C-FRAME KITS

- Great for punching junction boxes and small enclosures
- Punch can be used with ram inside or outside of the junction box
- For use with 1/2" – 1" conduit size and accessory sizes only

1732 HYDRAULIC C-FRAME KIT

- Use with Greenlee 1/2" – 4" conduit size standard round punches and dies only

HYDRAULIC C-FRAME KITS

CAT. NO.	UPC NO.	DESCRIPTION
1731	783310159117	Hydraulic C-Frame Kit
1731H767	783310204862	Hydraulic C-Frame Kit with Hand Pump
1732	783310273615	Hydraulic C-Frame Kit with Hand Pump



1732

CAT. NO.	DESCRIPTION	1731	1731H767	1732
12079	C-Frame (1731)	X	X	-
11903	C-Frame (1732)	-	-	X
15631	Ram (1731)	X	X	-
13577	Ram (1732)	-	-	X
06301	Hydraulic Hose – 1/4" x 3'	-	X	-
767	Hydraulic Hand Pump	-	X	-
13266	Punch Adapter – 3/8"	X	X	X
13267	Punch Adapter – 3/4"	X	X	X
13268	Punch Adapter – 1-1/8"	-	-	X
13261	Pilot Pin 1/2"	X	X	X
13262	Pilot Pin 3/4"	X	X	X
11791	Die Adapter – 3/4" x 3/8"	-	-	X
11790	Die Adapter – 3/4" x 3/4"	-	-	X
11789	Die Adapter – 3/4" x 1-7/8"	-	-	X
121AV	1/2" Conduit Size Standard Round Punch	X	X	-
12087	1/2" Conduit Size C-Frame Knockout Die	X	X	-
K3P-3/4	3/4" Conduit Size Standard Round Punch	X	X	-
12086	3/4" Conduit Size C-Frame Knockout Die	X	X	-
K3P-1	1" Conduit Size Standard Round Punch	X	X	-
12085	1" Conduit Size C-Frame Knockout Die	X	X	-
07714	Carrying Case	X	X	-
27335	Carrying Case	-	-	X

STUD PUNCHES



ESP710L11

Battery-Hydraulic Stud Punch

- Quickly and easily punches 1-11/32" (34.1 mm) diameter holes in 16 and 18 ga structural studs
- 4" throat depth from center of punch

CAT NO.	UPC NO.	DESCRIPTION
ESP710L11	783310521655	Punch, 3.0Ah 18V, Li-Ion Battery, 120V Charger

SPECIFICATIONS

Actual Hole Size	1-11/32" (34.1 mm)
Weight	9.2 lb (4.2 kg)
Length	15" (381 mm)
Height	11-3/4" (298 mm)
Capacity	16 ga (1.5 mm)







Plumber Stud Punch

- Punches 2-5/8" (66.7 mm) diameter hole in metal studs for installation of 2" water, vent, and waste pipes
- Two-speed lever action for fast, easy punching of 24 to 20 ga thick metal studs
- 2-1/8" (54 mm) throat width fits over most studs and channels
- High strength alloy aluminum c-frame and handle provide lightweight tool for easy handling—10.6 lb (4.8 kg)
- Lever action punch retraction strips punch out of metal stud fast and easy

SPECIFICATIONS

Actual Hole Size	2-5/8" (66.7 mm)
Weight	10.6 lb (4.8 kg)
Length	23-1/2" (596 mm)
Height	9-3/4" (247 mm)
Capacity	24-20 ga (0.9 mm)

CAT NO.	UPC NO.	DESCRIPTION
713	783310064305	Plumber Stud Punch
 08377	783310083771	Punch for 713
 08379	783310083795	Die for 713
 08375	7833100835757	Link
 55316	783310553168	Pin, Groove .31 x 1.75